

# pipistrello



KIKI



COBRA

LED+O



# PISTILLO



# IULIFRULI



MORE INFORMATION

Arclite: [www.arclite.com.au](http://www.arclite.com.au)

+61 2 9369 1411

[arclite@arclite.com.au](mailto:arclite@arclite.com.au)

**CIRCULAR POL**



**MEASURES**

Diameter:	150cm	150cm	90cm	90cm	52cm	52cm	52cm
Height:	14cm	14cm	14cm	14cm	10cm	10cm	10cm

**BULBS**

LIGHT SOURCE:	FLUORESCENT	LED	FLUORESCENT	LED	FLUORESCENT	FLUORESCENT	LED
Number:	8	5	6	3 x 19.4	1	1	1
Watts:	36W	20W	24W	58.2	55W	55W	28W
Base:	2G11		2G11		2GX13	2GX13	
Flux:	23200lm	12500lm	10800lm	6300lm	4200lm	4200lm	3000lm
Kelvin:	3000°	3000°	3000°	3000°	3000°	3000°	3000°
Class:	A	A +	A	A +	A +	A +	A ++
Dimmable:	Yes	Yes	Yes	Yes	No	Yes	Yes
ITEM CODE	2057/DIM/BI	2057/DIM/L/1/BI	2057/J/DIM/BI	2057/J/DIM/L/1/BI	2057/XS/BI	2057/XS/DIM/BI	2057/XS/DIM/L/1/BI

**PRICE**

		LED		LED			LED
List one off	\$4,200.00	\$5,020.00	\$2,900.00	\$3,290.00	\$900.00	\$1,100.00	\$1,300.00

**LUNAOP**



**MEASURES**

Diameter:	80cm	80cm	120cm	120cm	50cm	50cm
Height:	6.5cm	6.5cm	6.5cm	6.5cm	6.5cm	6.5cm

**BULBS**

LIGHT SOURCE:	LED	LED	LED	LED	LED	LED
Number:	1 x 72W	1 x 72W	1 x 108W	1 x 108W	1 x 48W	1 x 48W
Flux:	5600lm	5600lm	8400lm	8400lm	3700lm	3700lm
Kelvin:	3000°	3000°	3000°	3000°	3000°	3000°
Class:	A++	A++	A++	A++	A++	A++
Duration:	50000h	50000h	50000h	50000h	50000h	50000h
Dimmable:	N/A	PUSH O DALI	N/A	PUSH O DALI	N/A	PUSH O DALI

**UTILISATION:**

INTERNAL	INTERNAL	INTERNAL	INTERNAL	INTERNAL	INTERNAL	INTERNAL
----------	----------	----------	----------	----------	----------	----------

**TPOLOGY:**

HANGING	HANGING	HANGING	HANGING	HANGING	HANGING	HANGING
---------	---------	---------	---------	---------	---------	---------

**COLOUR:**

Structure:	WHITE	WHITE	WHITE	WHITE	WHITE	WHITE
Diffuser:	WHITE	WHITE	WHITE	WHITE	WHITE	WHITE

**MATERIALS**


Structure:	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM
Diffuser:	OPAL WHITE METHACRYLATE	OPAL WHITE METHACRYLATE	OPAL WHITE METHACRYLATE	OPAL WHITE METHACRYLATE	OPAL WHITE METHACRYLATE	OPAL WHITE METHACRYLATE

ITEM CODE	2086/L/1/BI	2086/DIM/L/1/BI	2086/G/L/1/BI	2086/G/L/1/BI	2086/J/L/1/BI	2086/J/L/1/BI
-----------	-------------	-----------------	---------------	---------------	---------------	---------------

**PRICE**

List one off	\$1,384	\$1,584	\$2,840	\$3,040	\$775	\$975
--------------	---------	---------	---------	---------	-------	-------

### LED+O

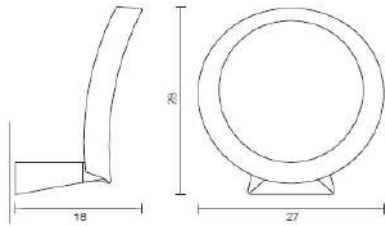

#### MEASURES

Diameter:	28cm	28cm	28cm	28cm
Depth:	19cm	19cm	19cm	19cm

#### BULBS

LIGHT SOURCE:	LED	LED	LED	LED
Number:	1 x 18W	1 x 18W	1 x 16W	1 x 16W
Flux:	2100lm	2000lm	2000lm	1900lm
Kelvin:	3000°	2700°	3000°	2700°
Class:	A ++	A ++	A ++	A ++
Dimmable:	N/A	N/A	1-10V	1-10V
Duration:	50000h	50000h	50000h	50000h

#### COLOUR:

Structure:	WHITE	WHITE	WHITE	WHITE
Diffuser:	SATIN WHITE	SATIN WHITE	SATIN WHITE	SATIN WHITE

#### MATERIALS

Structure:	ALUMINIUM OPAL WHITE METHACRYLATE	ALUMINIUM OPAL WHITE METHACRYLATE	ALUMINIUM OPAL WHITE METHACRYLATE	ALUMINIUM OPAL WHITE METHACRYLATE
------------	---	---	---	---

#### WEIGHT

Net:	1.5kg	1.5kg	1.5kg	1.5kg
------	-------	-------	-------	-------


#### ITEM CODE

	1434/BI	1434/2700/BI	1434/DIM/BI	434/DIM/2700/BI
--	---------	--------------	-------------	-----------------


#### PRICE

List one off	\$542	\$542	\$592	\$592
--------------	-------	-------	-------	-------

### COLIBRÌ




### Q8

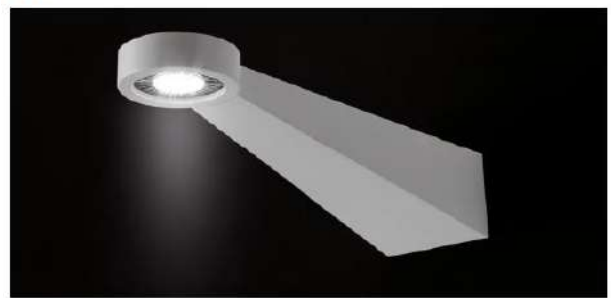

Apparecchio da parete a luce diretta /D/, a luce indiretta /I/ o a luce diretta e indiretta /DI/.  
Struttura in alluminio verniciato nel colore bianco.  
Sorgente di luce a LED.  
Alimentatore elettronico dimmerabile integrato nel corpo della lampada.

Wall mounted luminaria with direct light /D/, indirect light /I/ and direct and indirect light /DI/.  
Structure in white painted aluminum.  
Light source: LED.  
Electronic ballast dimmable integrated into the body lamp.




1296/D/DIM/L/1/T/BI 20W LED 40° 2050 LUMEN 3000K  
1296/I/D/DIM/L/1/T/BI 20W LED 40° 2050 LUMEN 3000K



### AQUILA



### SPOTTÒ







**R11**

Apparecchio a luce diretta orientabile con attacco per binario elettrificato. Struttura in alluminio verniciato nel colore bianco o antracite. Sorgente di luce a LED con diversi fasci luminosi 12° - 24° - 32°. Alimentatore elettronico integrato nella base di attacco dell'apparecchio.


Swivel device direct light, for electrified track. White and anthracite lacquered aluminium structure. For LED light source with different beam angles 12° - 24° - 32°. Electronic driver included in to the device.

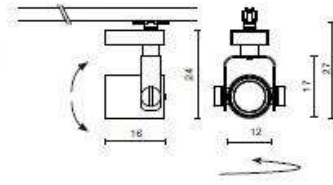


- 1407/XL/O/BI** 25W LED 12° 3300 LUMEN 3000K
- 1407/XL/O/AN** 25W LED 12° 3300 LUMEN 3000K
- 1407/XL/Q/BI** 25W LED 24° 3300 LUMEN 3000K
- 1407/XL/Q/AN** 25W LED 24° 3300 LUMEN 3000K
- 1407/XL/R/BI** 25W LED 32° 3300 LUMEN 3000K
- 1407/XL/R/AN** 25W LED 32° 3300 LUMEN 3000K



# POLO




## CALABRONE

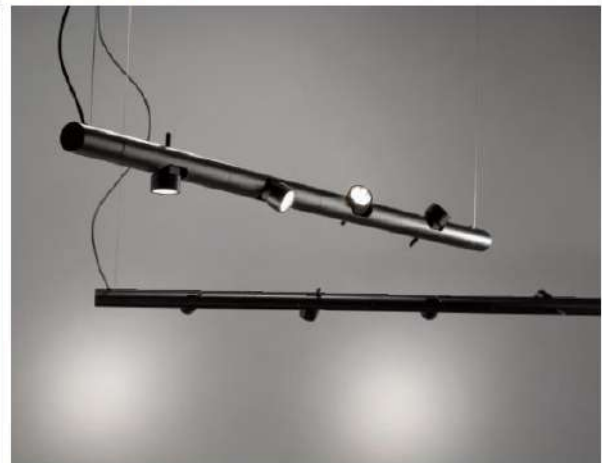

Modulo a sospensione a luce diretta orientabile. Struttura tubolare in alluminio verniciato nel colore nero, con 4 spot orientabili con sorgente di luce a LED, lente intercambiabile con fasci di apertura 18° - 25° - 35°. Alimentatori elettronici nella scatola fissata al soffitto. Disponibile anche nella versione a doppio modulo.

Modular hanging lamp swivel direct light with 4 swivel spot for LED light source, with interchangeable lens with beam angles 18° - 25° - 35°. Black lacquered aluminium structure. Electronic drivers into the box fixed at the ceiling. Available double module version.



- 2090/NE** 4 x 10W LED 35° 4 x 850 LUMEN 3000K
- 2090/G/NE** 4 x 10W LED 35° 4 x 850 LUMEN 3000K
- 40091** Lente con fascio di apertura 18° su richiesta. Lens with beam angle 18° on request.
- 40093** Lente con fascio di apertura 35° su richiesta. Lens with beam angle 35° on request.



## SHANGHAI



Apparecchio a sospensione a luce diffusa, formato da 4 tubi in policarbonato trasparente che rivestono la fonte di luce fluorescente, sono indipendenti l'uno dall'altro e sono collegati tramite giunti terminali stampati in policarbonato trasparente e i propri cavi di alimentazione di lunghezza diversa, regolabili, alla base di attacco al soffitto in metallo verniciato nel colore bianco. Completa di alimentatori elettronici.

Suspended diffused light device, independent 4 tubes a transparent polycarbonate which cover the fluorescent tubes. These ones are connected with joints in transparent polycarbonate and with their own power cables of vary adjustable lengths, to the white painted metal base. Complete with electronic ballast.



- 2053/4/DIM** 4 x 40W G5 T5 FL
- Optional:
- 30650** schermo microforato antiabbagliamento antiglare microperforated screen
- 30775** film radiante colorato / film radiant coloured

**MORE INFORMATION**

Arclite: [www.arclite.com.au](http://www.arclite.com.au)

+61 2 9369 1411

[arclite@arclite.com.au](mailto:arclite@arclite.com.au)