





TOKISTAR LIGHTING

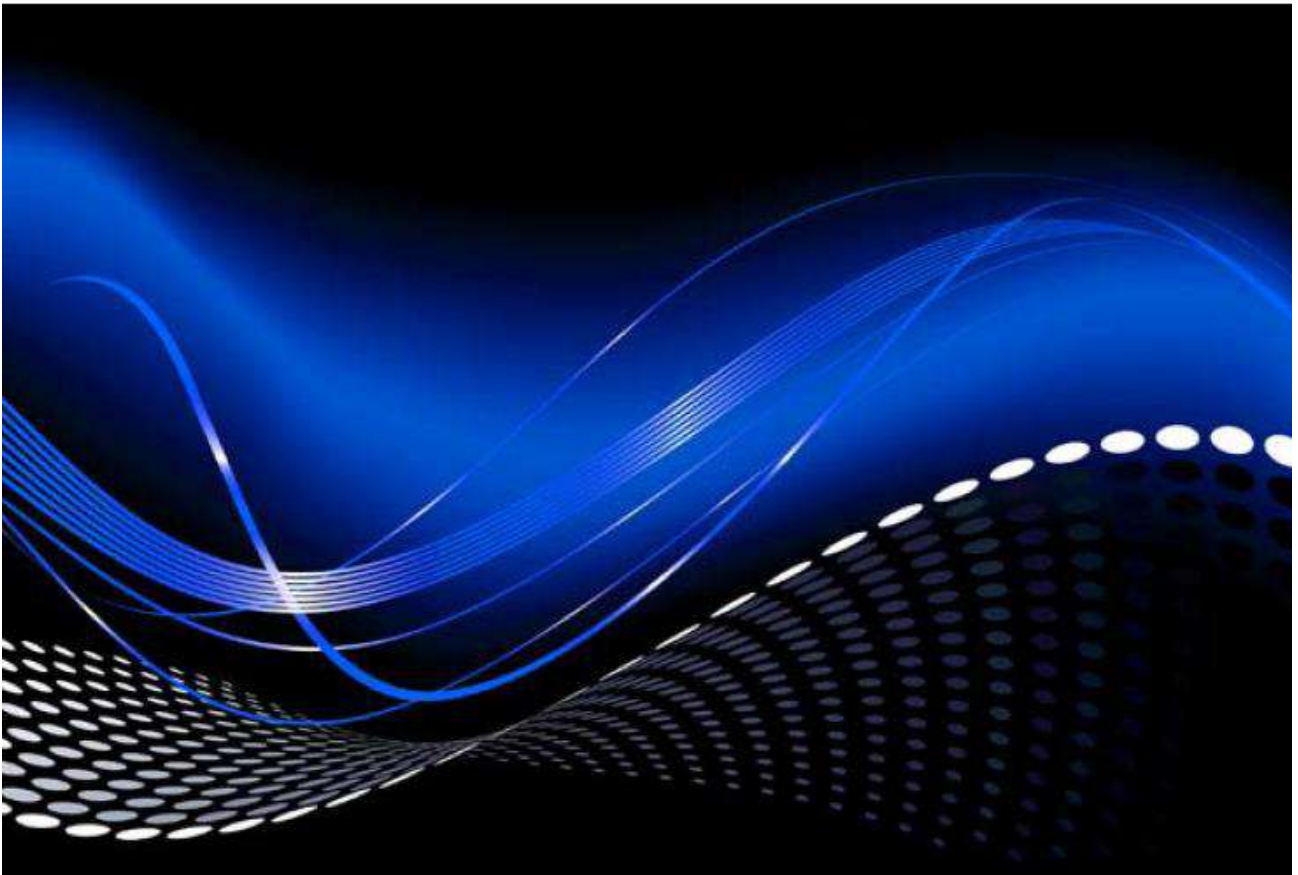

...THE ART OF LIGHTING INNOVATION

Micro Series™

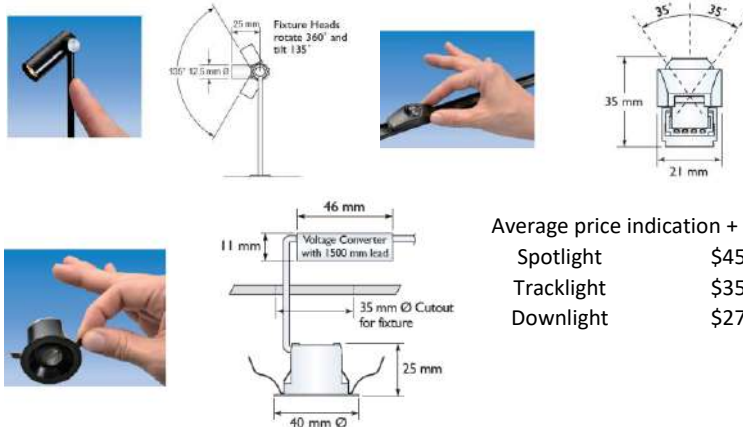

Average price indication + GST

Spotlight	\$450
Tracklight	\$350
Downlight	\$275

MORE INFORMATION

Arclite: www.arclite.com.au

+61 2 9369 1411

arclite@arclite.com.au

Linear wash lighting



Wall Grazer



Average price indication



Basic system \$340.00 + GST per meter

Wall Grazer \$575.00 + GST per meter


900 lumens per meter 3000k
20 watts per meter 24v

Color	Lumens/Foot
2400K	285 Lm
2700K	285 Lm
3000K	300 Lm


Basic System




TLXWG SERIES
(Shown with Mounting Clamp)




TLXWG-CH SERIES
(Shown with Fixed Bracket)



TLXWG-CHV SERIES
(Shown with Adjustable Bracket)

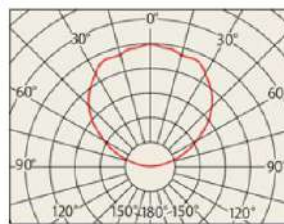


Soft wash (basic system)

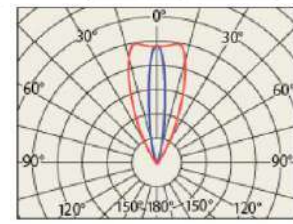


Directional wash (grazer)

Light Veil soft wall wash lighting

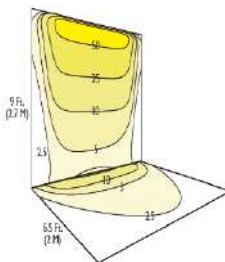

Light Distribution



-860 lumens per meter at 3000k

-20 watts per meter 24v

- Fixture length is from 210mm (increments) to 2.4 meters with maximum run length or 4.8 meters.

PRICE \$620 average per meter + GST

Extrusion Style		LED				
Code	Style	Code	Lumens Per Watt	Lumens Per Foot	CRI Value	Kelvin
LVRS	Recessed in Surface	2700	42.5	255 Lm	85	2700K
		3000	44.0	263 Lm	85	3000K
LVSM	Surface Mount	4000	47.5	285 Lm	85	4000K
LVRH	Recessed with Hinge					

Festoon lighting



G-19 globes are also available in transparent Green, Amber, Blue, Red and Violet.

Cable / Socket Color		Socket Spacing		LED		Globe Style		Globe Color		
Code	Color	Code	Inches (mm)	Code	Color	Watts/Volts	Code	Style	Code	Color
BK	Black	6	8" (150 mm)	UB	2400K White	1.8 W / 24 VAC	G19	G-19	C	Clear
WH	White	12	12" (300 mm)	VI	2400K White	1.8 W / 24 VAC	G14	G-14	F	Frosted
		18	18" (450 mm)				S14	S-14	G	Green
		24	24" (600 mm)						A	Amber
									B	Blue
									R	Red
									V	Violet
									M	Multi-Color

Virtual Incandescent (VI) not for use with Frosted Globes

WW 2900K White 0.48 W / 24 VAC
 WH 5500K White 0.48 W / 24 VAC
 BL Blue 0.48 W / 24 VAC
 GR Green 0.48 W / 24 VAC
 OR Orange 0.48 W / 24 VAC
 PL Purple 0.48 W / 24 VAC
 RD Red 0.48 W / 24 VAC
 YG Yellow-Green 0.48 W / 24 VAC

(Any Combination of 0.48 Watt Colors is Possible)

Xenon Lamp		
124	2500K	7.5 W / 24 VAC

Xenon lamp not for use with G-14 globes







Custom spacing is available

Average price indication

1.8w LED @ 500mm spacing \$95.00 + GST per meter

0.48w LED @ 500mm spacing \$75.00 + GST per meter

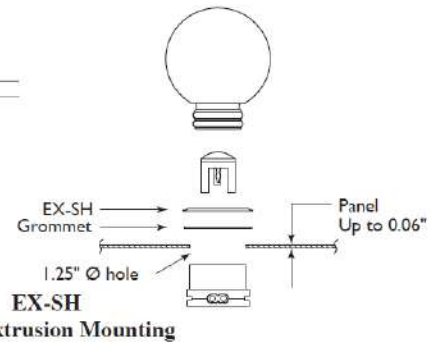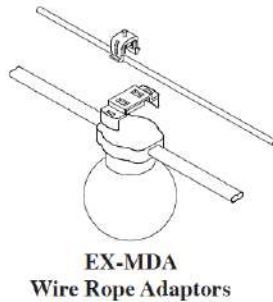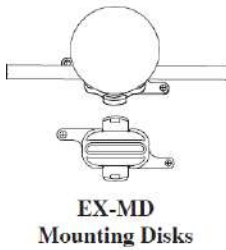


Lightstrings

Tree lighting and Signs



Specifications

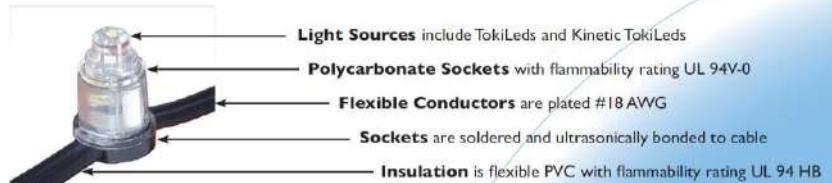

LIGHTSTRING COLOR	
Code	Color
FLBK	Black
FLWG*	Warm Grey
*Warm Grey available in 160, 210 and 310 mm only	

SOCKET SPACING		
Code	Inches	(mm)
60	60	mm
110	110	mm
160	160	mm
210	210	mm
310	310	mm
410	410	mm

TOKILED®			
Code	Color	Watts/Volts	
LW	2000K White	0.10 W / 8 VDC	
WW	2400K White	0.10 W / 8 VDC	
IW	3000K White	0.10 W / 8 VDC	
WH	8500K White	0.10 W / 8 VDC	
LW-HB	2000K White	0.20 W / 8 VDC	
WW-HB	2400K White	0.20 W / 8 VDC	
IW-HB	3000K White	0.20 W / 8 VDC	
WH-HB	8500K White	0.20 W / 8 VDC	
LW-UB	2000K White	0.40 W / 8 VDC	
WW-UB	2400K White	0.40 W / 8 VDC	
IW-UB	3000K White	0.40 W / 8 VDC	
WH-UB	8500K White	0.40 W / 8 VDC	

Average pricing indication based on 210mm spacing

FL LIGHTSTRINGS	SPACING	No of lamps MP	WATTS PM	Max run length	Price PM \$+GST
FLWG-210-WW-WP	210mm	0.1w 4.8	0.48	36m	\$34.50
FLWG-210-WWHB-WP	210mm	0.2w 4.8	0.96	26m	\$41.00
FLWG-210-WWUB-WP	210mm	0.4w 4.8	1.92	17m	\$44.00


Interior/Exterior Wall Grazer



High Output/All Environment



All Environment Indirect/RGB

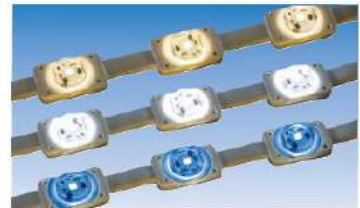

Interior Wall Grazer



Showcase Lighting




Three Degree Spotlights



High Output/Indirect Lighting




Low Profile Indirect

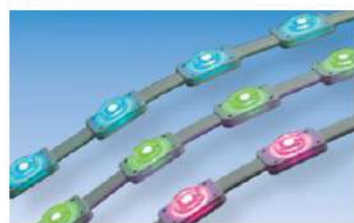


Festoon Lighting




Extrusions



TDR Series is for interior applications. The reflective finish and faceted profile creates multiple sparkling images.



TXRW Series is for interior applications. The semi-rigid PVC profile ensures linear integrity and is easily mounted to any surface.



TXRA Series is for exterior applications. Standard finish is satin aluminum and custom finishes are available upon request.



EXC Series incorporates our Exhibitor Series into a 2" x 2" aluminum profile for use in all environments

Flexible



MORE INFORMATION

Arclite: www.arclite.com.au

+61 2 9369 1411

arclite@arclite.com.au